RoHS Compliant | Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

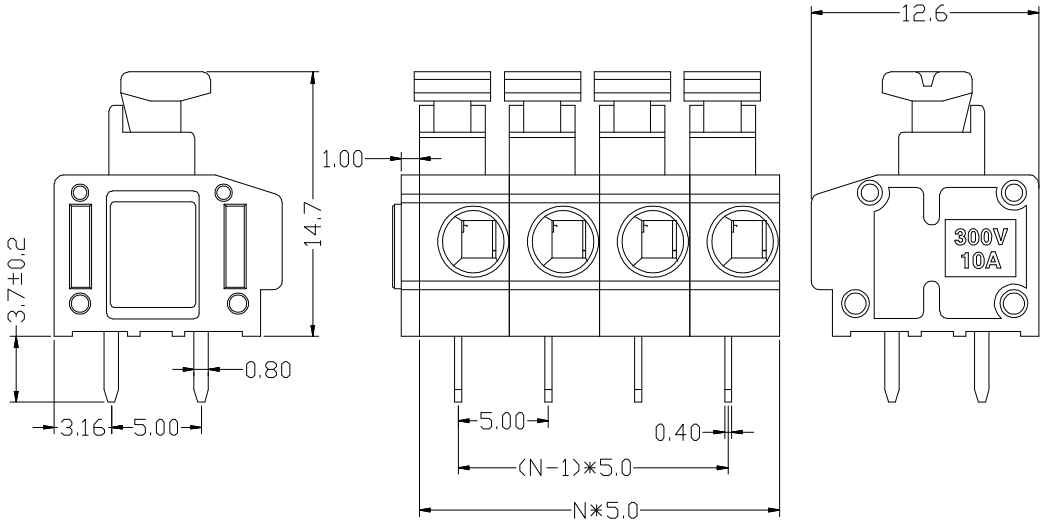

·Material
Pin header: Brass, Tin plated
Housing: PA66, UL94V-0

·Electrical
Rated voltage : 300V
Rated current : 5A
Contact resistance : 20mΩ
Insulation resistance : 5000MΩ/1000V
Withstanding voltage : AC1500V/1Min
Wire range : 20-18AWG 1.5mm²

·Mechanical
Temp.Range : -40℃∽+120℃
MAX Soldreing : +250℃, for 5 sec.
Strip length : 8-9mm

订购方式/HOW TO ORDER

□ □□ P — □ □ — X X X 客户需求 Customer Request

型号 Series NO.

极数 NO.of Pole

间距 Pitch

1	单间距	Single Pitch
2	双间距	Double Pitch

颜色 Color

1	灰色	Grey
2	蓝色	Blue
3	黑色	Black
4	绿色	Green

N=No.of contacts

Contact Us

TEL:+86－574－63510149 FAX:+86－574－63516735
E-Mail:Sales@cxsuteng.com Website:www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 DATE		2012.07.10	

慈溪市速腾电子有限公司
SUTOWN CIXI SUTENG ELECTRONIC CO., LTD

单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST235—5.0
角法 VIEW		设计 DESIGN	No.06		
比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	ST235—5.0
版本 VER	A0	核准 APPD		图号 DRAW NO.	ST235—5.0