
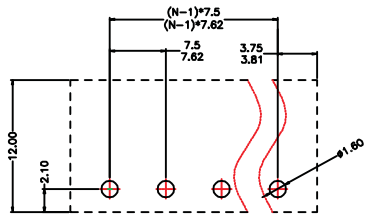





RoHS Compliant		Customer Drawing		REV.	ECN NO.	DESCRIPTION	DATE	DESIGN




PCB LAYOUT(RECOMMENDED)  
(TOP VIEW TOL. :±0.05)

N=No.of contacts

**SPECIFICATION**  
**MATERIAL**  
 Housing:PA66,UL94V-0  
 Pin Header:Brass,Tin Plated  
**ELECTRICAL**  
 Rated voltage:300V  
 Rated current: 15A  
 Withstanding voltage: AC4000V/1Min  
**MECHANICAL**  
 Operating Temperature:-40°C~+105°C

订购方式/HOW TO ORDER

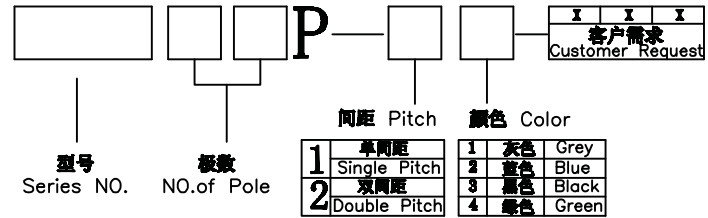

Contact Us

TEL:+86-574-63510149                      FAX:+86-574-63516735  
 E-Mail:Sales@cxsuteng.com                      Website:www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST2EDGR-7.5/7.62
.X	±0.20	.X°	±2°	角法 VIEW	⊕	设计 DESIGN	No.06	产品料号 PART NO.	ST2EDGR-7.5/7.62
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHECK		图号 DRAW NO.	ST2EDGR-7.5/7.62
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	版本 APPD	A0		ST2EDGR-7.5/7.62