RoHS Compliant | Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN



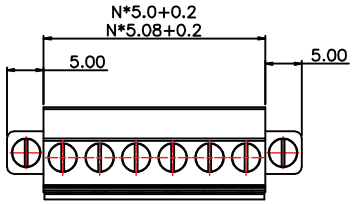



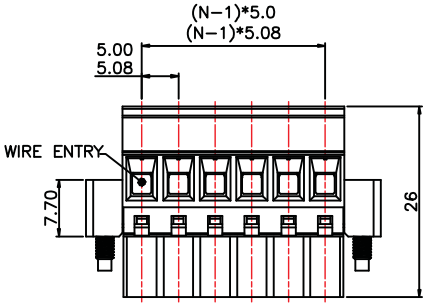



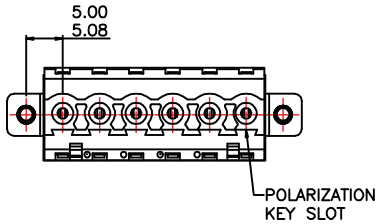

N=No.of contacts

SPECIFICATION

MATERIAL
- Housing:PA66,UL94V-0
- Screw:M3 Steel ,Zinc Plated
- Terminal:Phosphor Bronze,Tin Plated
- Clamp:Brass,Ni Plated

ELECTRICAL
- Rated voltage:300V
- Rated current: 15A
- Wire Range(AWG/MM²):24-12AWG/0.2-2.5MM²
- Withstanding voltage: AC4000V/ 1Min

MECHANICAL
- Torque:0.4Nm(3.5Lb-In.)
- Strip Length:7mm
- Operating Temperature:-40℃~+105℃

订购方式/HOW TO ORDER

[ ] [ ][ ] P — [ ] [ ] — [X][X][X] 客户需求 Customer Request

型号 Series NO. | 极数 NO.of Pole | 间距 Pitch | 颜色 Color

1	单间距	Single Pitch
2	双间距	Double Pitch

1	灰色	Grey
2	蓝色	Blue
3	黑色	Black
4	绿色	Green

Contact Us

TEL:+86－574－63510149 FAX:+86－574－63516735
E-Mail:Sales@cxsuteng.com Website:www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 DATE		2012. 07. 10	

慈溪市速腾电子有限公司
SUTOWN CIXI SUTENG ELECTRONIC CO., LTD

单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST2EDGKBM—5.0/5.08
角法 VIEW		设计 DESIGN	No.06		
比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	ST2EDGKBM—5.0/5.08
版本 VER	A0	核准 APPD		图号 DRAW NO.	ST2EDGKBM—5.0/5.08