



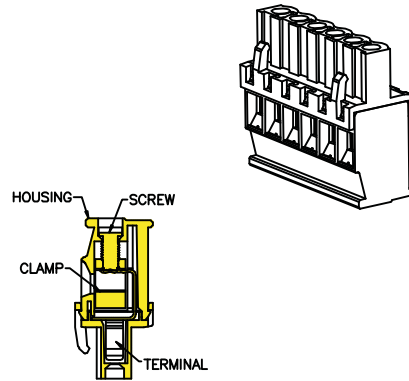


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN



SPECIFICATION

MATERIAL

Housing:PA66,UL94V-0
 Screw:M3 Steel ,Zinc Plated
 Terminal:Phosphor Bronze,Tin Plated
 Clamp:Brass,Ni Plated


ELECTRICAL

Rated voltage:300V
 Rated current: 15A
 Wire Range(AWG/MM²):24-12AWG/0.2-2.5MM²
 Withstanding voltage: AC4000V/ 1Min

MECHANICAL

Torque:0.4Nm(3.5Lb-In.)
 Strip Length:7mm
 Operating Temperature:-40°C~+105°C

订购方式/HOW TO ORDER

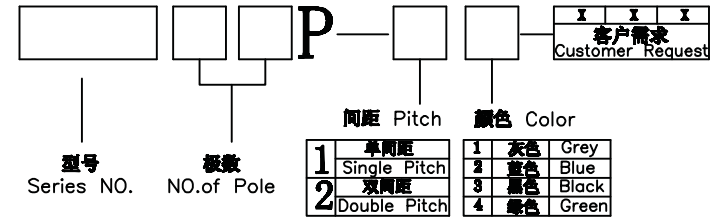

Contact Us

TEL:+86-574-63510149

FAX:+86-574-63516735

E-Mail:Sales@cxsuteng.com

Website:www.cxsuteng.com

N=No. of contacts

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 SUTOWN CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X*.	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST2EDGKA-7.5/7.62
.X	±0.20	.X*.	±2°	角法 VIEW	第三角	设计 DESIGN	No.06	产品料号 PART NO.	ST2EDGKA-7.5/7.62
.XX	±0.15	.XX*.	±1°	比例 SCALE	1:1	审核 CHKD		图号 DRAW NO.	ST2EDGKA-7.5/7.62
.XXX	±0.02	.XXX*.	±0.5°	日期 DATE	2012.07.10	版本 APPD	AO		ST2EDGKA-7.5/7.62