


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

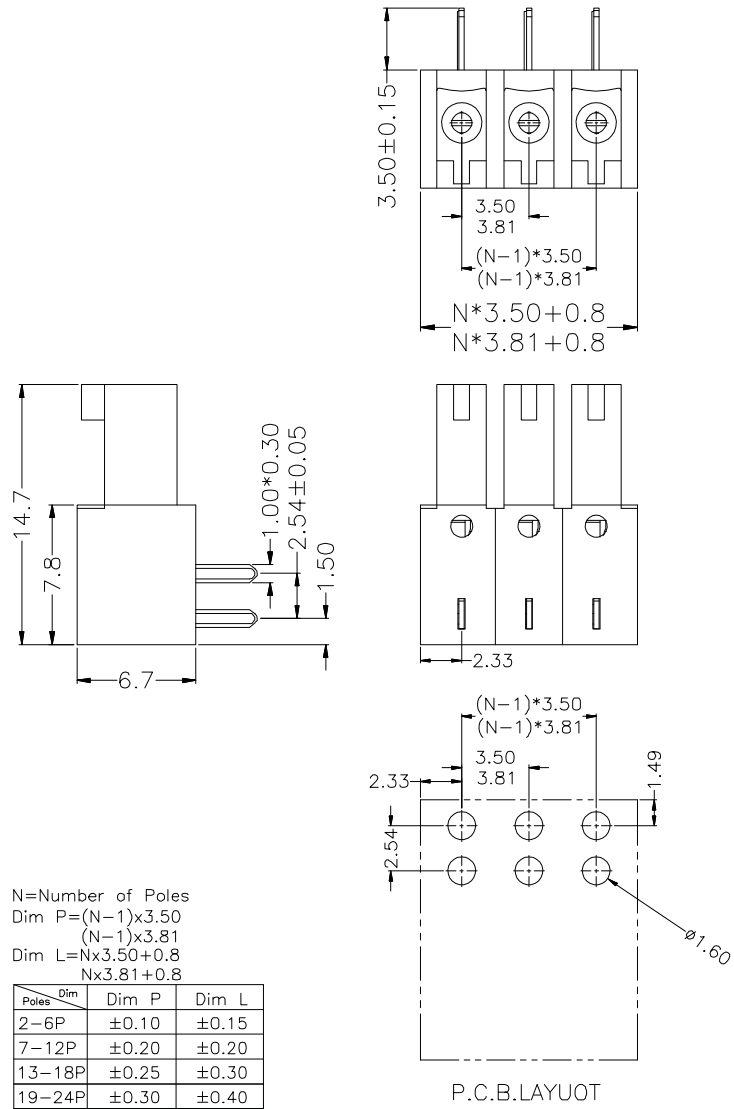

N=Number of Poles  
 Dim P=(N-1)x3.50  
 (N-1)x3.81  
 Dim L=Nx3.50+0.8  
 Nx3.81+0.8

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

·Material

- ①Housing: PA66, UL94V-0
- ②Pin header: Phosphor bronze, Tin plated


·Electrical

Rated Voltage: 300V  
 Rated Current: 8A  
 Contact Resistance: 20mΩ  
 Insulation Resistance: 500MΩ/1000V  
 Withstanding Voltage: AC1500V/1Min

·Mechanical

Temperature Range: -40℃~+105℃  
 MAX Soldering: +250℃, 5秒(5 Seconds)

订购方式/HOW TO ORDER

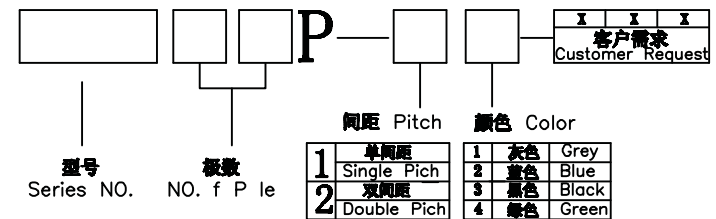

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°.	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST15EDGA-3.5/3.81
.X	±0.20	.X°.	±2°	角法 VIEW	第三角	设计 DESIGN	No.06	产品料号 PART NO.	ST15EDGA-3.5/3.81
.XX	±0.15	.XX°.	±1°	比例 SCALE	1:1	审核 CHECK		图号 DRAW NO.	ST15EDGA-3.5/3.81
.XXX	±0.02	.XXX°.	±0.5°	日期 DATE	2012.07.10	版本 VER	AO	核准 APPD	