
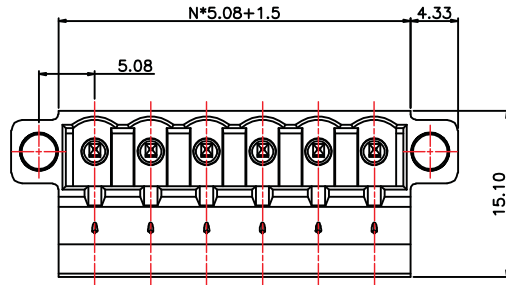


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

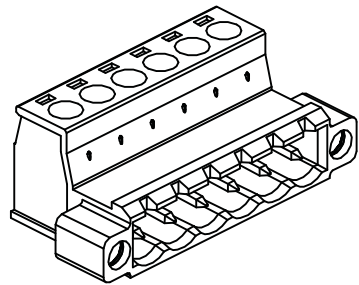

SPECIFICATION

MATERIAL




Housing: PA66, UL94V-0
 Screw: M3 Steel, Zinc Plated
 Terminal: Phosphor Bronze, Tin Plated
 Clamp: Brass, Ni Plated

ELECTRICAL

Rated voltage: 300V
 Rated current: 15A
 Wire Range (AWG/MM²): 24-12AWG/0.2-2.5MM²
 Withstanding voltage: AC4000V/1Min

MECHANICAL

Torque: 0.4Nm (3.5Lb-in.)
 Strip Length: 7mm
 Operating Temperature: -40°C ~ +105°C

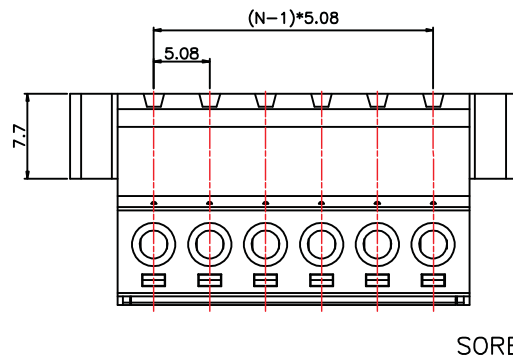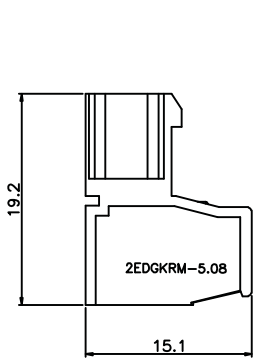


订购方式/ HOW TO ORDER

Series NO. NO. of Pole Pitch Color

Customer Request

1	单间距	1	灰色	Grey
	Single Pitch	2	蓝色	Blue
2	双间距	3	黑色	Black
	Double Pitch	4	绿色	Green

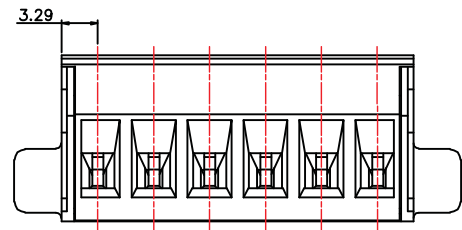

N=No. of contacts

Contact Us

TEL: +86 - 574 - 63510149 FAX: +86 - 574 - 63516735
 E-Mail: Sales@cxsuteng.com Website: www.cxsuteng.com

公差一览表				慈溪市速腾电子有限公司					
TOLERANCE UNLESS OTHERWISE				SUTOWN CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°.	±5°	单位	mm	制图	No.01	产品名称	ST2EDGKRM-5.08
.X	±0.20	.X°.	±2°	角法	第一角法	设计	No.06	图号	
.XX	±0.15	.XX°.	±1°	比例	1:1	审核		产品料号	ST2EDGKRM-5.08
.XXX	±0.02	.XXX°.	±0.5°	版本	A0	核准		图号	ST2EDGKRM-5.08
日期	2012.07.10			版本	A0	核准		图号	ST2EDGKRM-5.08
DATE	2012.07.10			VER	A0	APPD		DRAW NO.	ST2EDGKRM-5.08