


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

SPECIFICATION
MATERIAL
Housing:PA66,UL94V-0
Pin Header:Brass,Tin Plated
ELECTRICAL
Rated voltage:300V
Rated current: 8A
Withstanding voltage: AC2000V/ 1Min
MECHANICAL
Strip Length:10mm
Operating Temperature:-40°C~+105°C

订购方式/HOW TO ORDER

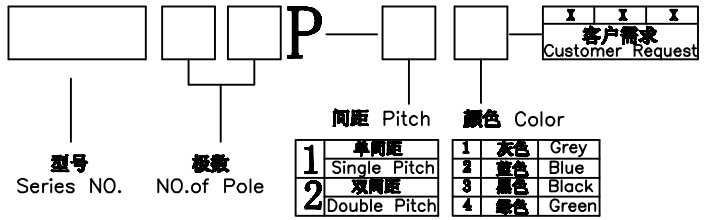

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

Contact Us

TEL:+86 - 574-63510149 FAX:+86-574-63516735
E-Mail:Sales@cxsuteng.com Website:www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST15EDGVC-3.5/3.81
.X	±0.20	.X°	±2°	角法 VIEW	第三角	设计 DESIGN	No.06	产品料号 PART NO.	ST15EDGVC-3.5/3.81
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHKD		图号 DRAW NO.	ST15EDGVC-3.5/3.81
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012. 07. 10	版本 APPD	AO		

N=No.of contacts